

Material:



- Housing: PC UL94V-0
- Insert Material: PBT+20%GF UL94V-0
- PCB Material: FR-4 (Thickness 1.6MM)
- Contact Material: Phosphor Bronze Stamp Pin T=0.50MM
- IDC Contact Material: Phosphor Bronze 50μ" Gold T=0.50MM

Electrical:

- Voltage Rating: 125V AC RMS
- Current Rating: 1.5 AMP
- Contact Resistance: 100MΩ Max.
- Insulation Resistance: 1,000MΩ Min. @ 500V DC
- Dielectric Strength: 750V AC RMS 60Hz, 1 Min.

Environmental:

- Storage: -40°C ~ +85°C
- Operational Temperature: 0°C ~ +70°C
- Conform to TIA/EIA 568 B.2-1
- Mates with modular plug conforming to FCC part 68, Subpart F

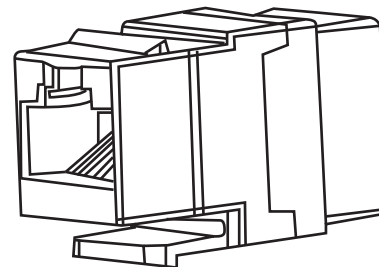

⊕ = Assmann logo



<i>ITEM NO.</i>	A-TA3534-R
<i>TITLE</i>	Keystone Jack Cat5e, 50μ", RJ45 <=> RJ45, F-Thru Slim Style, Black

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2009 by Assmann Electronic Components
All International Rights Reserved